

ARS 150

SINGLE DRUM ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

APPLICATIONS

- Medium and large compaction sites
- Transport construction
- Municipal and town roads
- Rock fill dams
- Industrial zones
- City centers



PRODUCTIVITY

No-rear-axle

Provides low centre of gravity and high versatility.

Compaction performance

Two-stage vibratory system, high compaction output.

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility.

Operator station

High comfort and safety.

SERVICEABILITY

Reduced downtime

Heavy-duty components and robust construction.

Reduced maintenance

Extended service intervals; easy-to-reach maintenance points.

SUSTAINABILITY

ECodrop

Improved efficiency, reduced use of fluids.

Digitalization

Advanced monitoring and measuring systems

OPTIONAL EQUIPMENT

- A/C
- A/C without cooling medium
- Additional documentation printed
- AmmannCare Diamond
- AmmannCare Platinum
- AmmannCare Gold
- AmmannCare Silver
- Ammann Documentation Syst. ADS
- Ammann Documentation Syst. ADS RTK
- Additional storage rack Cab version
- ATC - Ammann Traction Control
- Back-up alarm
- Back-up alarm adaptive
- Cab ROPS
- Certificate of origin
- Color scheme customer
- Compaction measuring system ACE^{force}
- Container shipment preparation
- Dozer blade incl. transpot lock
- Drive HX (ATC mandatory)
- Drum PD - including scrapers
- Engine air inlet pre-cleaner
- Fire extinguisher
- Fuel tank lock
- GPS Q-Compaction ACE
- GPS Q-Compaction preparation
- GPS Q-Compaction preparation ACE
- Homologation Italy (plate only)
- Hydraulic oil biodegradable
- Measuring points central
- Padfoot Shell Kit - including scrapers
- Plate for Static Test
- Radio DAB
- Radio preparation
- Rear view camera
- Registration plate holder incl. light
- Road lights incl. turn signals
- Scrapers vulcolan for smooth drum
- Seat belt 3"
- Maintenance Kit 1000h
- Maintenance Kit 2000h
- Maintenance Kit 500h
- Slow moving vehicle triangle
- Sun visor
- Tachograph complete
- Telematics Servicelink Plus
- Telematik Servicelink Pro
- Telematics preparation
- Tool box
- Toolset
- Tractor tyres
- Warning beacon LED
- Warning beacon LED green
- Greasing tool
- Weight increase kit additional


STANDARD EQUIPMENT

- Open platform with ROPS
- Smooth drum
- Steel scrapers
- Diamond tread tyres
- ECodrop
- Inter wheel flow divider
- 2 amplitudes / Multiple frequencies
- Operator's station with one drive lever (RH)
- Rotatable and horizontally adjustable driver's seat with armrests
- Multi-functional display for machine control and overview
- Adjustable steering column
- Intelligent drive lever
- 12V outlet
- Battery disconnection switch
- Working lights (front / rear) - LED
- Standard hydraulic oil
- Testports on hydrocomponents
- Manual hood opening and Cab tilting
- Telematics Ready
- Ammann color design and decals
- External draining points
- On-board diagnostics
- CE conformity
- Safety cover fan and alternator
- Tyre ballast -25°C

AMMANN

ARS 150

StV / T4f

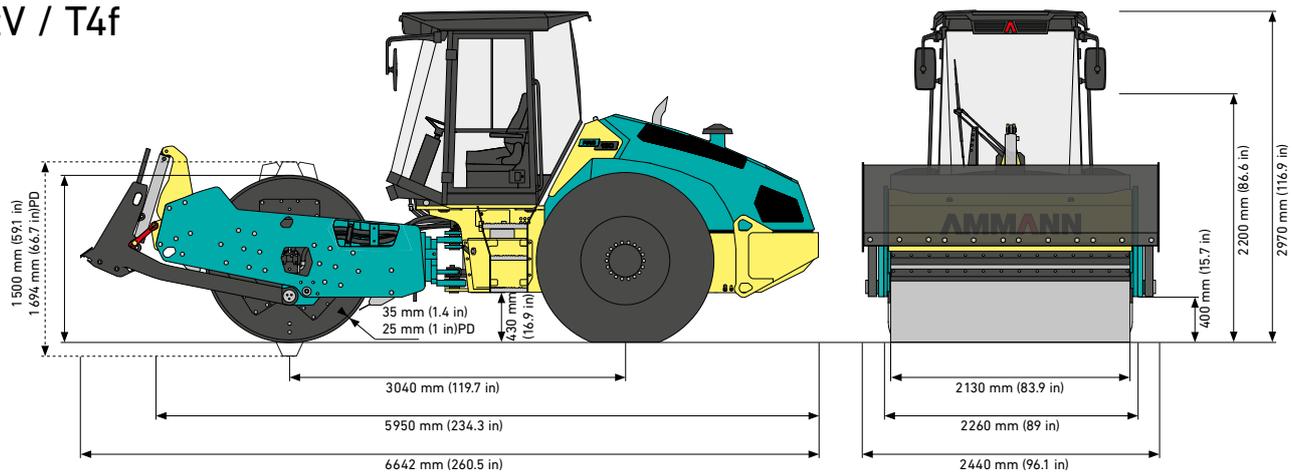

WEIGHT & OPERATING CHARACTERISTICS

		PD	HX	HXPD
OPERATING WEIGHT	14 800 kg (32 628 lb)	15 120 kg (33 334 lb)	14 810 kg (32 650 lb)	15 130 kg (33 356 lb)
OPERATING WEIGHT MAX.	17 700 kg (39 022 lb)	16 505 kg (36 387 lb)	17 710 kg (39 044 lb)	16 515 kg (36 409 lb)
STATIC LINEAR LOAD	42.2 kg/cm (236.3 lb/in)	-	42.3 kg/cm (236.9 lb/in)	-
NUMBER OF PADS	-	140 pcs	-	140 pcs
PAD CONTACT SURFACE	-	120 cm ² (18.6 sq in)	-	120 cm ² (18.6 sq in)
PAD HEIGHT	-	100 mm (3.9 in)	-	100 mm (3.9 in)
MAX. WORKING SPEED	6.3 km/h (3.9 MPH)	6.3 km/h (3.9 MPH)	4.7 km/h (2.9 MPH)	4.7 km/h (2.9 MPH)
MAX. TRANSPORT SPEED	12.2 km/h (7.6 MPH)	12.2 km/h (7.6 MPH)	10 km/h (6.2 MPH)	10 km/h (6.2 MPH)
GRADEABILITY WITHOUT VIBRATION	53%	54%	67%	67%
GRADEABILITY WITH VIBRATION	50%	50%	55%	55%
TURNING RADIUS (INNER)	3 600 mm (141.7 in)	3 600 mm (141.7 in)	3 600 mm (141.7 in)	3 600 mm (141.7 in)

COMPACTION FORCES

	PD	
FREQUENCY I	25–29 Hz (1500–1740 vpm)	25–29 Hz (1500–1740 vpm)
FREQUENCY II	25–35 Hz (1500–2100 vpm)	25–35 Hz (1500–2100 vpm)
CENTRIFUGAL FORCE I	242–325 kN (54404–73063 lbf)	242–325 kN (54404–73063 lbf)
CENTRIFUGAL FORCE II	110–215 kN (24729–48334 lbf)	110–215 kN (24729–48334 lbf)
AMPLITUDE I	2.06 mm (0.081 in)	1.93 mm (0.076 in)
AMPLITUDE II	0.96 mm (0.038 in)	0.88 mm (0.035 in)

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

	PD	
ROCKFILL	* 1 200 mm (47 in)	-
SAND / GRAVEL	* 800 mm (31 in)	-
MIXED SOILS	* 700 mm (28 in)	* 700 mm (28 in)
SILT	500 mm (20 in)	* 500 mm (20 in)
CLAY	300 mm (12 in)	* 350 mm (14 in)

* Recommended drum type

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-disc spring brake
BRAKES EMERGENCY	Multiple-disc spring brake
FUEL TANK CAPACITY	345 l (91.1 gal)
HYDRAULIC TANK CAPACITY	76 l (20.1 gal)
STEERING ANGLE	±36°
OSCILLATION ANGLE	±10°
BATTERY VOLTAGE	24V
BATTERY CAPACITY	2x90 Ah

ENGINE

MANUFACTURER	Perkins
ENGINE TYPE	904J
POWER ACCORDING TO ISO 14396	106 kW (142 HP)
ENGINE SPEED	2200 rpm
EXHAUST GAS AFTER-TREATMENT	EGR+DOC+DPF+SCR
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4 Final

ARS 150 StV

For additional product information and services please visit: www.ammann.com

Materials and specification data are subject to change without notice.

MSS-3276-01-EN | © Ammann Group

AMMANN