

ARS 200

SINGLE DRUM ROLLER

EU STAGE V / U.S. EPA TIER 4 FINAL

APPLICATIONS

- Large compaction sites
- Airports runways
- Rock fill dams
- Harbours
- Dumpsite construction
- Railway lines



PRODUCTIVITY

No-rear-axle

Provides low centre of gravity and high versatility

Compaction performance

Two-stage vibratory system, high compaction output

ERGONOMICS

Platform and cab

Spacious and quiet, with 360° visibility

Operator station

High comfort and safety

SERVICEABILITY

Reduced downtime

Heavy-duty components and robust construction

Reduced maintenance

Extended service intervals; easy-to-reach maintenance points

SUSTAINABILITY

ECODrop

Improved efficiency, reduced use of fluids

Advanced technologies

Machine usage controlled to bring efficiency, productivity – and enable precise documentation

OPTIONAL EQUIPMENT

- A/C
- A/C without cooling medium
- Additional documentation printed
- Additional lights 360° LED
- AmmannCare Diamond
- AmmannCare Platinum
- AmmannCare Gold
- AmmannCare Silver
- Ammann Documentation Syst. ADS
- Ammann Documentation Syst. ADS RTK
- Back-up alarm
- Back-up alarm adaptive
- Certificate of origin
- Color scheme customer
- Compaction measuring system ACE^{force}
- Container shipment preparation
- Drive HX
- Drum PD - including scrapers
- Engine air inlet pre-cleaner
- Fire extinguisher
- GPS Q-Compaction ACE^{force}
- GPS Q-Compaction preparation
- GPS Q-Compaction preparation ACE^{force}
- Homologation Italy (plate only)
- Hydraulic oil biodegradable
- Measuring points central
- Padfoot Shell Kit - including scrapers
- Radio FM
- Radio preparation
- Rear view camera
- Registration plate holder incl. light
- Road lights incl. turn signals
- Scrapers vulcolan for smooth drum
- Maintenance Kit 2000h
- Maintenance Kit 1000h
- Maintenance Kit 500h
- Slow moving vehicle triangle
- Tachograph complete
- Telematics Servicelink Plus
- Telematik Servicelink Pro
- Telematics preparation
- Toolset
- Tractor tyres
- Tyres loader 23.5x25
- Warning beacon LED
- Warning beacon LED green
- Greasing tool


STANDARD EQUIPMENT

- Smooth drum
- Steel scrapers
- Diamond tread tyres
- ECODrop
- 2 amplitudes / Multiple frequencies
- Operator's station with one drive lever (RH)
- Rotatable and horizontally adjustable driver's seat with armrests
- Multi-functional display for machine control and overview
- Adjustable Steering column
- Intelligent drive lever
- 12V outlet
- Battery disconnection switch
- Working lights (front / rear) - LED
- Standard hydraulic oil
- Testports on Hydrocomponents
- Telematics Ready
- Ammann color design and decals
- External draining points
- On-board diagnostics
- Ammann Traction Control - ATC
- Cab and bonnet tilting electro-hydraulic
- Cab ROPS/FORS
- CE conformity
- Safety cover fan and alternator
- Sun visor
- Tyre ballast -25°C

AMMANN

ARS 200

StV / T4f

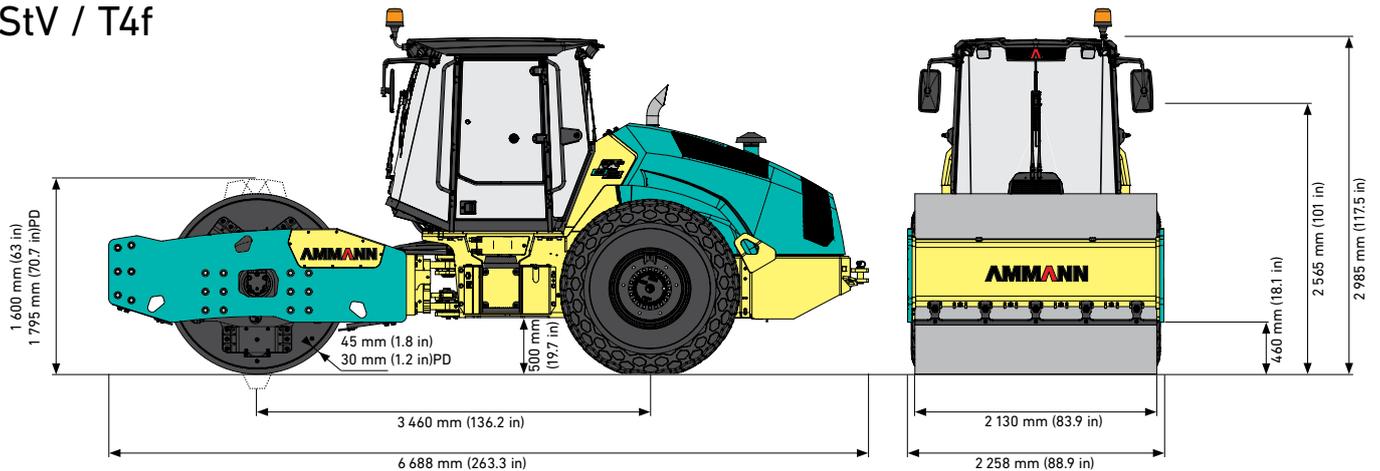

WEIGHT & OPERATING CHARACTERISTICS

	PD	HX	HXPD
OPERATING WEIGHT CAB	19 900 kg (43872 lb)	20 030 kg (44159 lb)	19 900 kg (43872 lb)
OPERATING WEIGHT CAB MAX.	22 440 kg (49472 lb)	20 240 kg (44622 lb)	22 440 kg (49472 lb)
STATIC LINEAR LOAD	58.6 kg/cm (328.1 lb/in)	-	58.6 kg/cm (328.1 lb/in)
NUMBER OF PADS	-	140 pcs	-
PAD CONTACT SURFACE	-	143 cm ² (22.2 sq in)	-
PAD HEIGHT	-	120 mm (4.7 in)	-
MAX. WORKING SPEED	7 km/h (4.3 MPH)	7 km/h (4.3 MPH)	7 km/h (4.3 MPH)
MAX. TRANSPORT SPEED	12 km/h (7.5 MPH)	12 km/h (7.5 MPH)	11 km/h (6.8 MPH)
GRADEABILITY WITHOUT VIBRATION	55%	55%	60%
GRADEABILITY WITH VIBRATION	50%	50%	55%
TURNING RADIUS (INNER)	4 370 mm (172 in)	4 370 mm (172 in)	4 370 mm (172 in)

COMPACTION FORCES

	PD	
FREQUENCY I	23-27 Hz (1,380-1,620 vpm)	23-27 Hz (1 380-1 620 vpm)
FREQUENCY II	30-34 Hz (1,800-2,040 vpm)	30-34 Hz (1 800-2 040 vpm)
CENTRIFUGAL FORCE I	275-378 kN (61,822-84,978 lbf)	275-378 kN (61 822-84 978 lbf)
CENTRIFUGAL FORCE II	233-300 kN (52,380-67,443 lbf)	233-300 kN (58,380-67,443 lbf)
AMPLITUDE I	2 mm (0.079 in)	2 mm (0.079 in)
AMPLITUDE II	1 mm (0.039 in)	1 mm (0.039 in)

MISCELLANEOUS

BRAKES OPERATING	Hydrostatic
BRAKES PARKING	Multiple-discspring brake
BRAKES EMERGENCY	Multiple-discspring brake
FUEL TANK CAPACITY	350 l (92.5 gal)
Hydraulic tank capacity	115 l (30.4 gal)
STEERING ANGLE	±36°
OSCILLATION ANGLE	±10°
BATTERY VOLTAGE	24V
BATTERY CAPACITY	2x100 Ah

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

	PD	
ROCKFILL	* 1 800 mm (71 in)	-
SAND / GRAVEL	* 1 100 mm (43 in)	-
MIXED SOILS	* 900 mm (35 in)	* 900 mm (35 in)
SILT	700 mm (28 in)	* 700 mm (287 in)
CLAY	350 mm (14 in)	* 400 mm (16 in)

* Recommended drum type

ENGINE

MANUFACTURER	DEUTZ
ENGINE TYPE	TCD 6.1 L6
POWER ACCORDING TO ISO 14396	160 kW (215 HP)
ENGINE SPEED	2200 rpm
EXHAUST GAS AFTER-TREATMENT	EGR+DOC+DPF+SCR
EMISSION STAGE	EU Stage V / U.S. EPA Tier 4 Final

ARS 200 StV

For additional product information and services please visit: www.ammann.com

Materials and specification data are subject to change without notice.

MSS-1413-06-EN | © Ammann Group

AMMANN